


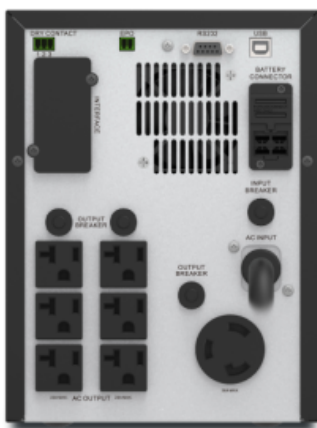

General

Provided equipment	Documentation CD User manual USB cable
--------------------	--

Physical

Depth	45.5 cm
Height	24 cm
Net weight	31.5 kg
Width	18 cm

Input

Network frequency	45...65 Hz auto-sensing
Plug standard	NEMA L5-30P
Input voltage limits	78...150 V
Input voltage	120 V

Output

Rated power in W	2100 W
Maximum configurable power in W	2100 W
Output frequency	50/60 Hz +/- 1 Hz unsynchronised
Crest factor	3 : 1
UPS type	Line interactive
Wave type	Sine wave
Nb of power socket outlets	6 NEMA 5-20R 1 NEMA L5-30R
Output voltage	120 V

Conformance

Product certifications	NOM TÜV
------------------------	------------

Standards	UL 1778
-----------	---------

Environmental

Ambient air temperature for operation	0...40 °C
Relative humidity	0...95 % non-condensing
Operating altitude	0...10000 ft
Ambient air temperature for storage	-10...40 °C
Storage altitude	0.00...3048.00 m
Acoustic level	45 dBA

Battery

Battery type	Lead-acid battery
Number of battery filled slots	0
Number of battery free slots	0
Battery recharge time	4 h
Liquid value	0

Communication

Free slots	1
Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
Emergency power off	Yes

Contractual warranty

Warranty	2 years repair or replace
----------	---------------------------